


Table of Gliding Window Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Window Dimension	2'-11 1/4" (895)	3'-11 1/4" (1200)	4'-11 1/4" (1505)	5'-11 1/4" (1810)
Minimum Rough Opening	3'-0" (914)	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)
Unobstructed Glass (single sash only)	12 9/16" (319)	18 9/16" (472)	24 9/16" (624)	30 9/16" (776)
1'-10 1/4" (565)	1'-11" (584)	1'-11 1/8" (599)	1'-11 1/4" (614)	1'-11 1/2" (629)
2'-11 1/4" (895)	3'-0" (914)	3'-0 1/8" (929)	3'-0 1/4" (944)	3'-0 1/2" (959)
3'-5 1/4" (1048)	3'-6" (1067)	3'-6 1/8" (1082)	3'-6 1/4" (1097)	3'-6 1/2" (1112)
3'-11 1/4" (1200)	4'-0" (1219)	4'-0 1/8" (1234)	4'-0 1/4" (1249)	4'-0 1/2" (1264)
4'-11 1/4" (1505)	5'-0" (1524)	5'-0 1/8" (1539)	5'-0 1/4" (1554)	5'-0 1/2" (1569)



Active Passive


Viewed from the exterior. Passive sash will open after active sash has been opened.

- "Window Dimension" always refers to outside frame-to-frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ◊ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

Handle Location

Operational force of handle is equal to 8 lbs/3.6 kg.

Dimensions shown are from top of handle in open position.

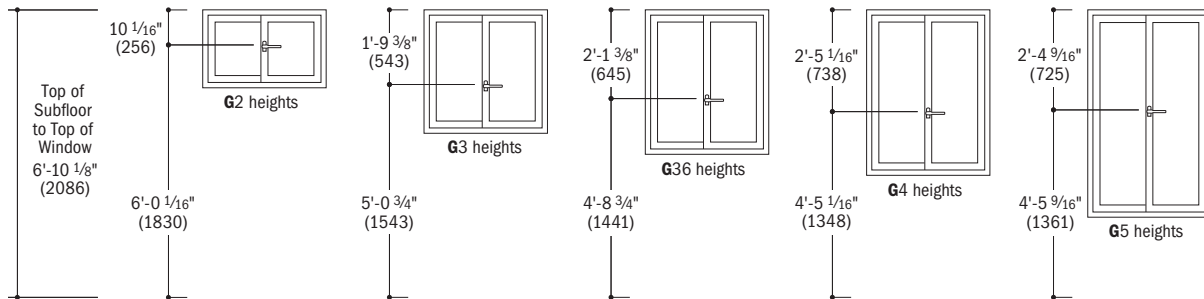

• Dimensions in parentheses are in millimeters.