

Table of Commercial Outswing Entry Door and Sidelight Sizes

Scale 1/8" = 1'-0" (1:96)

Door Dimension	1'-3 15/16" (405)	2'-1 11/16" (652)	2'-7 11/16" (805)	2'-9 11/16" (856)	3'-1 11/16" (957)	3'-9 15/16" (1167)	6'-2 3/4" (1899)
6'-10" (2083)							
7'-1 5/16" (2167)							
7'-1 1/4" (2413)							




Custom-size doors are available in 1/8" (3) increments.

Standard sizes shown. Available in both 10" (254) and 12" (305) bottom rail heights. For additional stile widths and additional options contact your Andersen supplier. This door has a limited water rating (LW) due to the low-threshold sill. See page 205 for threshold and bottom rail details. Handle and lock are located between 34" (864) and 48" (1219).

Check local building codes, including the Americans with Disabilities Act (ADA) accessibility.

• Dimensions in parentheses are in millimeters.

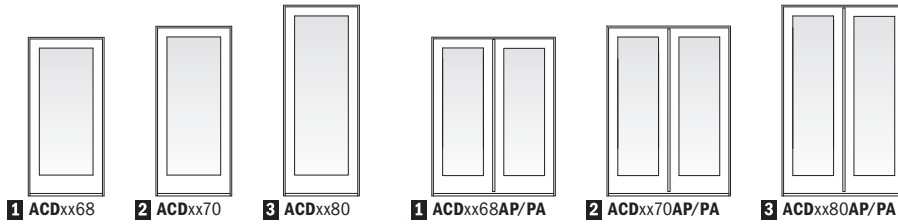

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. 3068S or 4068SS).

Commercial Outswing Entry Door Dimensions and Specifications


Door Number	Number of Panels Open*	Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Glass Area Sq. Ft./ (m ²)	Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)		
		Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)					
ACD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.45 (1.81)	33 1/8" (841)	35 1/16" (891)	79 1/8" (2029)	10.60 (0.98)	19.45 (1.81)	21.46 (1.99)
ACD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.78 (2.12)	39 1/8" (994)	41 1/16" (1043)	79 1/8" (2029)	13.15 (1.22)	22.78 (2.12)	24.88 (2.31)
ACD3868	1	45 15/16" (1167)	82" (2083)	46 7/16" (1180)	82 1/2" (2180)	24.02 (2.23)	41 3/8" (1051)	43 3/16" (1100)	79 1/8" (2029)	14.11 (1.31)	24.02 (2.23)	26.16 (2.43)
ACD3070	1	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	20.26 (1.88)	33 1/8" (841)	35 1/16" (891)	83 3/16" (2113)	11.17 (1.04)	20.26 (1.88)	22.33 (2.07)
ACD3670	1	43 11/16" (1110)	85 5/16" (2167)	44 3/16" (1122)	85 13/16" (2180)	23.72 (2.20)	39 1/8" (994)	41 1/16" (1043)	83 3/16" (2113)	13.86 (1.29)	23.72 (2.20)	25.88 (2.40)
ACD3870	1	45 15/16" (1167)	85 5/16" (2167)	46 7/16" (1180)	85 13/16" (2426)	25.02 (2.32)	41 3/8" (1051)	43 3/16" (1100)	83 3/16" (2113)	14.87 (1.38)	25.02 (2.32)	27.22 (2.53)
ACD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.61 (2.10)	33 1/8" (841)	35 1/16" (891)	92 1/8" (2359)	12.84 (1.19)	22.61 (2.10)	24.86 (2.31)
ACD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.48 (2.46)	39 1/8" (994)	41 1/16" (1043)	92 1/8" (2359)	15.94 (1.48)	26.48 (2.46)	28.82 (2.68)
ACD3880	1	45 15/16" (1167)	95" (2413)	46 7/16" (1180)	95 1/2" (2096)	27.94 (2.60)	41 3/8" (1051)	43 3/16" (1100)	92 1/8" (2359)	17.10 (1.59)	27.94 (2.60)	30.31 (2.82)
ACD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.69 (2.48)	44 3/16" (1122)	48 1/8" (1222)	79 1/8" (2029)	12.46 (1.16)	26.69 (2.48)	28.90 (2.68)
ACD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.76 (1.19)	21" (533)	23" (584)	79 1/8" (2029)	12.46 (1.16)	12.76 (1.19)	28.90 (2.68)
ACD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.35 (3.10)	56 3/16" (1427)	60 1/8" (1527)	79 1/8" (2029)	16.08 (1.49)	33.35 (3.10)	35.73 (3.32)
ACD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	16.09 (1.49)	27" (686)	29" (737)	79 1/8" (2029)	16.08 (1.49)	16.09 (1.49)	35.73 (3.32)
ACD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.57 (3.30)	60 3/16" (1529)	64 1/8" (1629)	79 1/8" (2029)	17.79 (1.65)	35.57 (3.30)	38.01 (3.53)
ACD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.20 (1.60)	29" (737)	31" (787)	79 1/8" (2029)	17.79 (1.65)	17.20 (1.60)	38.01 (3.53)
ACD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	40.01 (3.72)	68 3/16" (1732)	72 1/8" (1832)	79 1/8" (2029)	21.20 (1.97)	40.01 (3.72)	42.57 (3.95)
ACD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2180)	19.41 (1.80)	33" (838)	35" (889)	79 1/8" (2029)	21.20 (1.97)	19.41 (1.80)	42.57 (3.95)
ACD4070	2	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	27.80 (2.58)	44 3/16" (1122)	48 1/8" (1222)	83 3/16" (2113)	13.13 (1.22)	27.80 (2.58)	30.07 (2.79)
ACD4070	1	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	13.29 (1.23)	21" (533)	23" (584)	83 3/16" (2113)	13.13 (1.22)	13.29 (1.23)	30.07 (2.79)
ACD5070	2	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	34.73 (3.23)	56 3/16" (1427)	60 1/8" (1527)	83 3/16" (2113)	16.95 (1.57)	34.73 (3.23)	37.18 (3.45)
ACD5070	1	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	16.75 (1.56)	27" (686)	29" (737)	83 3/16" (2113)	16.95 (1.57)	16.75 (1.56)	37.18 (3.45)
ACD5470	2	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	37.04 (3.44)	60 3/16" (1529)	64 1/8" (1629)	83 3/16" (2113)	18.75 (1.74)	37.04 (3.44)	39.55 (3.67)
ACD5470	1	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	17.91 (1.66)	29" (737)	31" (787)	83 3/16" (2113)	18.75 (1.74)	17.91 (1.66)	39.55 (3.67)
ACD6070	2	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2180)	41.67 (3.87)	68 3/16" (1732)	72 1/8" (1832)	83 3/16" (2113)	22.34 (2.08)	41.67 (3.87)	44.29 (4.11)
ACD6070	1	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2426)	20.22 (1.88)	33" (838)	35" (889)	83 3/16" (2113)	22.34 (2.08)	20.22 (1.88)	44.29 (4.11)
ACD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	31.04 (2.88)	44 3/16" (1122)	48 1/8" (1222)	92 1/8" (2359)	15.10 (1.40)	31.04 (2.88)	33.48 (3.11)
ACD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.83 (1.38)	21" (533)	23" (584)	92 1/8" (2359)	15.10 (1.40)	14.83 (1.38)	33.48 (3.11)
ACD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.78 (3.60)	56 3/16" (1427)	60 1/8" (1527)	92 1/8" (2359)	19.49 (1.81)	38.78 (3.60)	41.40 (3.85)
ACD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.70 (1.74)	27" (686)	29" (737)	92 1/8" (2359)	19.49 (1.81)	18.70 (1.74)	41.40 (3.85)
ACD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.36 (3.84)	60 3/16" (1529)	64 1/8" (1629)	92 1/8" (2359)	21.56 (2.00)	41.36 (3.84)	44.04 (4.09)
ACD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.99 (1.86)	29" (737)	31" (787)	92 1/8" (2359)	21.56 (2.00)	19.99 (1.86)	44.04 (4.09)
ACD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.52 (4.32)	68 3/16" (1732)	72 1/8" (1832)	92 1/8" (2359)	25.69 (2.39)	46.52 (4.32)	49.31 (4.58)
ACD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.57 (2.10)	33" (838)	35" (889)	92 1/8" (2359)	25.69 (2.39)	22.57 (2.10)	49.31 (4.58)

• "Door Dimension" always refers to outside frame to frame dimension.
 • "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 • Dimensions in parentheses are in millimeters or square meters.
 *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
ACSLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
ACSLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
ACSLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
ACSLD0870	9 15/16" (252)	85 5/16" (2167)	10 7/16" (265)	85 13/16" (2180)	3.93 (0.37)	5.89 (0.55)
ACSLD1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	7.32 (0.68)	9.44 (0.88)
ACSLD2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	12.84 (1.19)	15.22 (1.41)
ACSLD3070	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	19.63 (1.82)	22.33 (2.07)
ACSLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
ACSLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
ACSLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
ACSLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

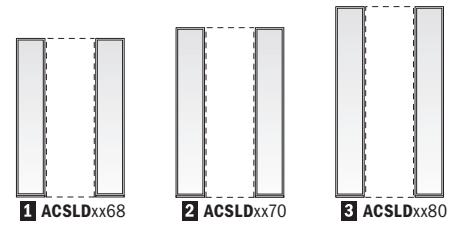


Direct-set (ACSLD) commercial outswing entry door sidelights.

Sash-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSL01068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	3.41 (0.32)	9.08 (0.84)
ACSL02068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	7.56 (0.70)	14.63 (1.36)
ACSL02668	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	8.79 (0.82)	18.04 (1.68)
ACSL02868	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	9.21 (0.86)	19.18 (1.78)
ACSL01070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	3.59 (0.33)	9.44 (0.88)
ACSL02070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	7.97 (0.74)	15.22 (1.41)
ACSL02670	31 11/16" (805)	85 5/16" (2167)	32 3/16" (818)	85 13/16" (2180)	9.26 (0.86)	18.77 (1.74)
ACSL02870	33 11/16" (856)	85 5/16" (2167)	34 3/16" (868)	85 13/16" (2180)	9.71 (0.90)	19.96 (1.85)
ACSL01080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	4.13 (0.38)	10.51 (0.98)
ACSL02080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	9.16 (0.85)	16.95 (1.57)
ACSL02680	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	10.65 (0.99)	20.9 (1.94)
ACSL02880	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	11.17 (1.04)	22.22 (2.06)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

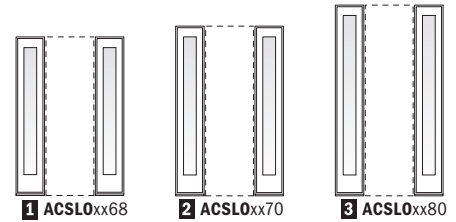

Sash-set (ACSL0) commercial outswing entry door sidelights.